


LFH60

Magnetic Temperature and Humidity Transmitter

LEFOO

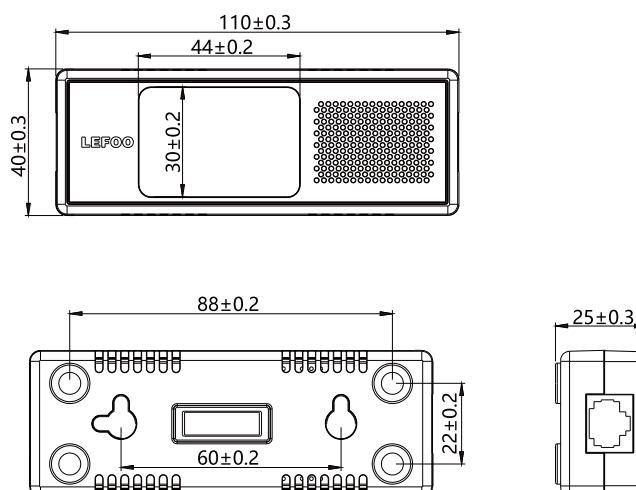

Dimension in : mm

LFH60 Temperature and Humidity Transmitter adopts high-precision sensor, built-in temperature and humidity sensor, high precision, fast response speed, and good long-term stability. There are four powerful magnets on the back, which can be directly attached to the cabinet or wall-mounted, which greatly improves the installation efficiency. Can display temperature, humidity, address. The product is widely used in communication rooms warehouse buildings, libraries and other places.

Specification

General	Value
(1)Relative humidity	
Sensor	Digital
Range	0%~100%
Output	RS485/Modbus
Accuracy	±3%@ 20°C&60%RH
(2)Temperature	
Sensor	Digital
Output	RS485/Modbus
Accuracy	±0.3°C@20°Csee table below
Power supply	9-26VDC
Display	Optional LCD display ,with unit display
Shell Material	ABS shell
Working Environment	-20~60°C,5%-95%RH(non-condensing)
Protection Level	Ip30

